

LED Floodlight



Product features:


- Robust PDC Aluminium housing
- Frosted glass diffuser
- PIR sensor option available
- Full IP65 construction including PIR sensor
- 0.75m fly-wire cable as standard
- CRI>80




Item	Part Number	12NC	Wattage	Lumens	Efficacy	CCT
ECOLINK FLD 10W 840 IP65	ECOFL10-4K	911401854485	10W	850lm	IP65	4000K
ECOLINK FLD 10W 840 IP65 PIR	ECOFL10-4K-PIR	911401854585	10W	850lm	IP65	4000K
ECOLINK FLD 20W 840 IP65	ECOFL20-4K	911401854685	20W	1700lm	IP65	4000K
ECOLINK FLD 20W 840 IP65 PIR	ECOFL20-4K-PIR	911401854785	20W	1700lm	IP65	4000K
ECOLINK FLD 30W 840 IP65	ECOFL30-4K	911401854885	30W	2550lm	IP65	4000K
ECOLINK FLD 30W 840 IP65 PIR	ECOFL30-4K-PIR	911401854985	30W	2550lm	IP65	4000K
ECOLINK FLD 50W 840 IP65	ECOFL50-4K	911401855085	50W	4250lm	IP65	4000K
ECOLINK FLD 50W 840 IP65 PIR	ECOFL50-4K-PIR	911401855185	50W	4250lm	IP65	4000K
ECOLINK FLD 70W 840 IP65	ECOFL70-4K	911401858185	70W	5950lm	IP65	4000K
ECOLINK FLD 100W 840 IP65	ECOFL100-4K	911401858285	100W	8500lm	IP65	4000K
ECOLINK FLD 150W 840 IP65	ECOFL150-4K	911401858385	150W	12750lm	IP65	4000K
ECOLINK FLD 200W 840 IP65	ECOFL200-4K	911401858485	200W	17000lm	IP65	4000K

Dimensions:

Standard

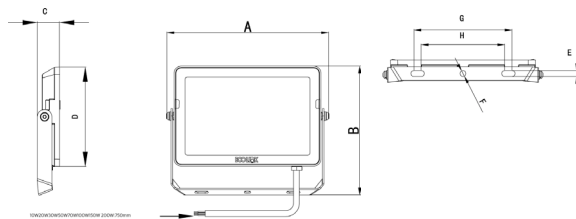

PIR

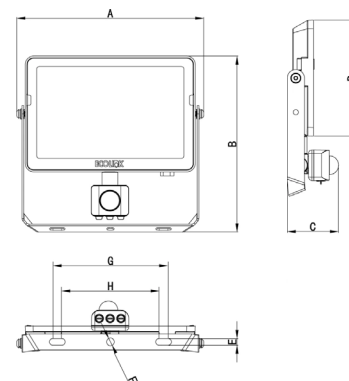

	Wattage	A	B	C	D	E	F	G	H
Standard	10W	107	102	28	62	5	5.5	50	40
	20W	140	125	29	85	5	5.5	81	69
	30W	185	161	28	117	6	6.5	106	94
	50W	223	183	31	136	8.5	9	135	115
	70W	276	217	31	172	8.5	9	135	115
	100W	324	256	38	204	8.5	9	170	150
PIR	10W	107	137	58	62	5	5.5	50	40
	20W	140	153	54	85	5	5.5	81	69
	30W	185	183	56	117	6	6.5	106	94
	50W	223	210	57	136	8.5	9	135	115